

Tarpaulin black fire-retardant 50m

Specifications


Dimensions Height (mm) 1760

Dimensions Width (mm) 50000

Package quantity 1

Weight (Kg) 14.08

Disclaimer. There are no rights to be derived from the technical specification. You should alaways consider up to 10% tolerance deviations. Heras herewith complies with NEN-EN 10305-3 @ Heras

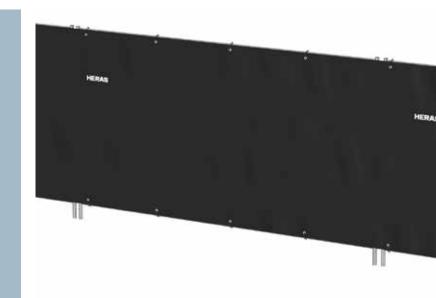

Create a professional barrier with fire-retardant tarpaulin

Easy site screening with black tarpaulin

This black tarpaulin roll allows you to quickly create a neat, safe and private barrier around construction sites, storage areas or backstage zones. The roll measures 50 metres in length and 1.80 metres in height. It features reinforced edges with brass eyelets for easy attachment to temporary fences using cable ties (not included). The continuous roll also covers the gaps between fence panels. This fire-retardant tarpaulin is NVO certified and offers 92% visual blackout.

- Professional appearance on-site
- Effective visual shielding
- Fire-retardant fencing mesh certified to EN 13501-1 Class B

Fire-retardant mesh for added safety

The NVO mesh material is fire-retardant and significantly contributes to the safety of workers and visitors in and around the construction site. It complies with the DIN 4102 B1 standard (DIN EN 13501), which consists of two parts. This widely recognised European standard is strictly enforced by fire brigades and event organisers. A B1 classification means the tarpaulin is highly flame-resistant and safe for use on-site.

Safety and stability in windy conditions

When fencing is fitted with mesh or tarpaulin, it catches more wind. To prevent fences from toppling, we recommend securing them with struts or installing them semi-permanently using ground-fixed posts. Not all temporary fences are suitable for tarpaulin installation – our experts are happy to advise you. Heras Mobile can also take care of the full installation process.

